CHANGZHOU XINGGAN DRYING EQUIPMENT CO.,LTD
Tel：+86-519-88900188 Mobile： +8618661216636
Wechat: zlx635771893 E-mail: franklxz@xggz.com

YK Series Oscillating Granulator

Changzhou Xinggan Drying Equipment Co., LTD

Introduction

YK Oscillation Granulator is mainly adopted in industries like pharmacy, chemicals and food so as to produce various particles which may be dried and made into different finished products. This equipment is also suitable to smash dry material solidified into blocks.

Working Principle

YK Oscillating Granulator is to granulate pre-mixed material into required particles or to smash blocks of material into small particles.

Application

This machine is well used in industries in pharmacy, chemicals, food and solid beverage.

Instructions for use

1. Start the machine and pour the mixture into the hopper. The squeezed material will pass through the screen to form particles by the swinging action of the rotating drum. damage.
2. Note: If the powder cannot stop in the powder hopper, do not use the shovel to avoid injury to your hands. Use bamboo shovel or stop working.

Changzhou Xinggan Drying Equipment Co., LTD

Swing pellet machine maintenance instructions

1. Check the parts regularly, once a month, check whether the movable parts such as worm gears, worms, bearings, etc. are flexible and abraded. If defects are found, they should be repaired in time, and they should not be used reluctantly.
2. The machine should be placed in a dry and clean room, and the atmosphere must not contain acids and other corrosive gases flowing to the machine parts.
3. After the machine is used for one time or when it is stopped, the rotating drum should be taken out for cleaning or the remaining powder in the hopper should be cleaned, and then installed, ready for the next use.
4. If the machine is not used for a long time, the whole body of the machine must be wiped clean, and the smooth surface of the machine part should be coated with anti-rust oil and covered with a cloth canopy.

TECHNICAL PARAMETERS

Model / Item	YK-160	YK-320
Production Capacity	50-200 kg/h	50-400 kg/h
Motor Power	2.2kw	7.5kw
Rotor Speed	65rpm	65rpm
Swing Angle	360º	360º
Rotor Diameter	Φ160mm	Φ320mm
Weight	450kg	750kg
Boundary Dimension	1000×800×1300m	1500×1200×1500m

Changzhou Xinggan Drying Equipment Co., LTD

More Photos

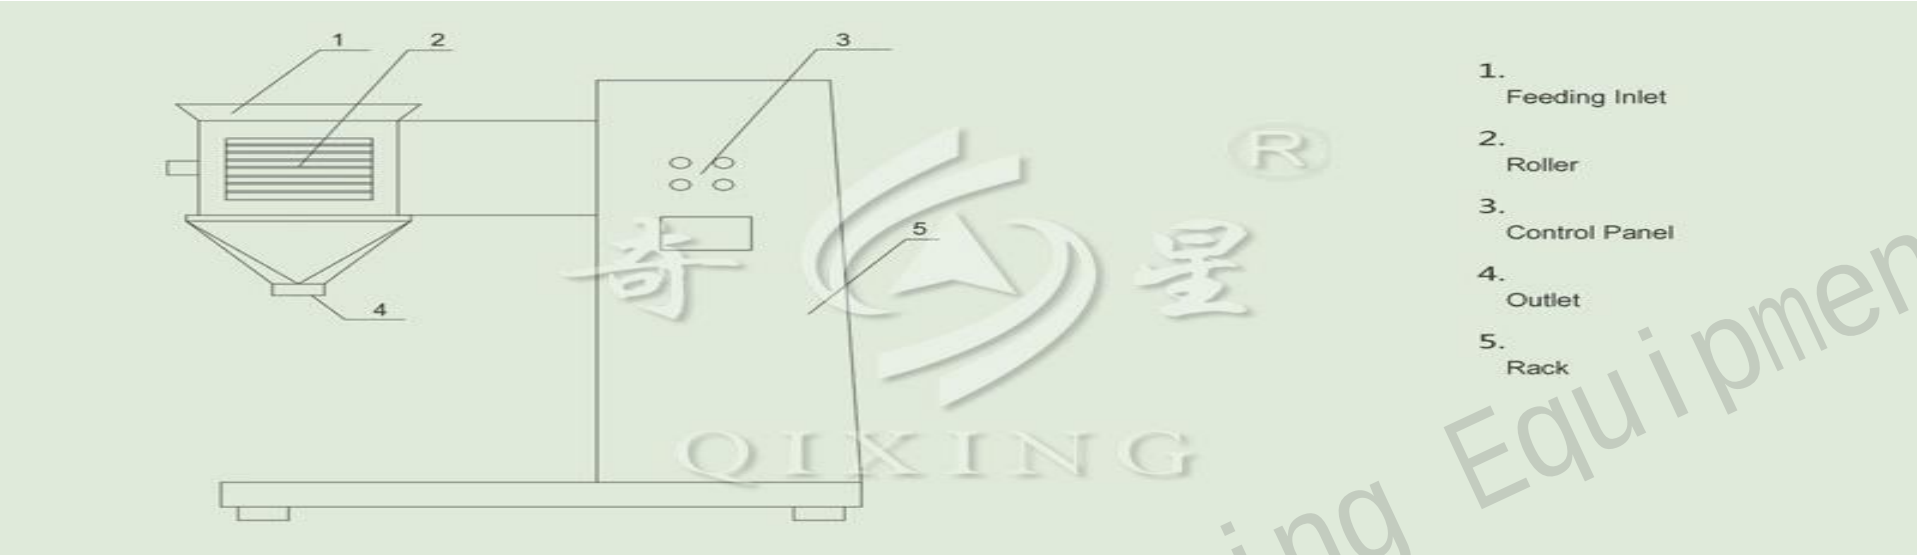

Guangzhou Yingqi Drying Equipment Co., LTD